WILDLAND 5

A Type 5 performance in a compact package 500-600 gallons water with Pump & Roll



WILDLAND 5



TANK:

500/600 Gallons water. 15 Gallons foam Integrated tank/body construction in high-strength polypropylene

CHASSIS:

International CV Series 515 Crew Cab, 4x4. 175" WB, 60" CA. Engine: International® 6.6 V8 Turbocharged Diesel. Engine:

- 350 hp @ 2700 RPM.
- 700 lb. ft. torque @1600 RPM. Transmission: Allison 2750 EVS. GVWR 23.000Lbs. Tire Size: 255/70R22.5.* Spare Wheel included. Heavy duty bumper - Optional


PUMP:

One of the following:
1) Engine Pump HALE HPX75-B18:
15 gpm @ 325 psi / 50 gpm @
250psi / 135 gpm @ 50 psi

2) Darley 1 1/2 AGYDDiesel (Tier 4 Final).120 gpm @ 75 psi / 75 gpm @ 125 psi / 20 gpm @ 145 psi

FOAM PROPORTIONING SYSTEM:

Trident FOAMATE. Around-The-Pump system. Class A.

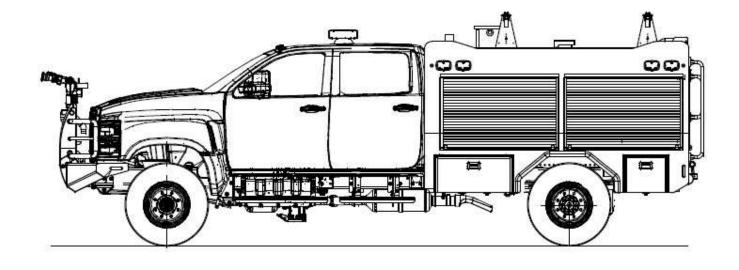

MONITOR, Bumper - Optional:

- Elkhart Brass 8495
- Akron Forestry 3462
 In cab remote control.
 Requires HD bumper.

BODY AND COMPARTMENTS:

Lightweight integrated construction.

Compartment Storage: 2 per side, fully customizable.

Aluminum roll-up doors. Enclosed rear engine pump.

INTAKES / DISCHARGES:

High flow TIG welded stainless steel discharge and suction manifolds.

- Rear Discharges:
 - ∘ 2 x 1 ½"
 - 1 x 1"
 - 1 x 1" Hose reel
- Front Discharges:
 - 1 x 2" Monitor
 - 1x 1 ½"
- Side Discharges: 2 x 1 ½"
- Suction: 2" 2.1/2"
 Depending on the engine pump.
- Tank Fill: 1x 2"

LIGHTING:

Emergency and priority Whelen lighting package.
According to NFPA requirements.
Scene lights, 2 per side.
Transit lighting according to law.

HOSE REEL:

Electric Hose Reel. Hannay Reel 100ft 1" booster hose. Located in rear compartment



EcoPolyFire® is a building technology using high-strength polypropylene with integrated tanks and body in a monoblock structure. More advanced, heavy-duty and lighter bodies, maximizing the tanks and lockers capacities.



25 YEARS WARRANTY



Flexibility: EPF® can absorb the energy and dissipate it in the surface, avoiding the tension concentrations which produce failures



Maintenance: EcoPolyFire does not need any preventive maintenance during its complete lifecycle



Density: Significantly lighter than conventional body systems allowing to increase the payload and therefore the tank capacity



Comparments: High flexibility in interior design Maximizes cargo capacity



Monoblock Concept Design: It allows the use of 100% bodywork volume



Recycling: All components built in EcoPolyFire are 100% recyclable



High Thermal Resistance



Potability: Tanks made of EcoPolyFire are compatible with the use of drinkable water



100% Corrosion-free: The material is fully resistant against corrosion



Compact Design



Dimensions:

Length: 285 in

Width: 96.4 in

Height: 101.0 in

Approach angle: 35°


Departure angle: 33°

Rollover Threshold: 31°

Turning radius: 27 ft

Curb clearance: 27.5 ft

Wall clearance: 31 ft



Weight:

Empty: 13,600 lbs.

Loaded: 20,650 lbs.





OPTIONS

- HEAVY DUTY FRONT BUMPER
- BUMPER MONITOR: AKRON FORESTRY 3462
- BUMPER MONITOR: ELKHART BRASS BRUSHHAWK 8495
- OFF ROAD DUAL TIRE 255/70R22.5 (6 UNITS) + SPEED CORRECTION DEVICE
- SUPER SINGLE WHEEL PACK 335/80R20 + BEADLOCKS,
 FENDER FLARES + SPEED CORRECTION DEVICE
- FRONT WINCH WARN 16T- 12V ELECTRIC
- HOSE BED ON ROOF (INITIAL ATTACK VERSION)
- GROUND SWEEPS TIRE PROTECTION
- GROUND SWEEPS ATTACK (2 NOZZLES UNDERNEATH FRONT BUMPER)
- HOIST FOR SPARE WHEEL
- LIGHTING PROTECTION GUARD KIT
- PIVOTING PANEL IN COMPARTMENT
- SLIDING TRAY IN COMPARTMENT 15.5IN X 15.5IN
- AUXILIARY GAS TANK 25GAL ADD
- FRONT BUMPER ENCLOSED TRAY FOR 30 FEET 1.5 HOSE
- FRONT BUMPER SMALL TRAY FOR 15 FEET 1,5 HOSE
- 1 HOSE BED 1.5" X 200' PRE-CONNECT
- OPTICOM OPTICOM® INFRARED SYSTEM
- FRONT BUMPER SKID PLATE
- HIGH RISE TIE ROD ASSY (CLEARANCE)
- SECOND REAR STEP
- DRILL-FREE LIGHTBAR CAB MOUNT
- SPARE TIRE REAR MOUNT NOT COMPATIBLE WITH SUPER SINGLE TIRES
- ITURRI COMPRESSED AIR FOAM SYSTEM (CAFS)
- ITURRI CAFS EXTRA DISCHARGE
- DARL FY FOAM PLIMP
- BLACK COLOR SET (ROLL UP DOORS, HANDLES AND REAR STEPS)
- MAXVISION WATER TANK LEVEL DISPLAY WLA280-A00
- LIGHTED FOLDING STEP
- M6 SCENE LIGHT M62SLB BLACK FLANGE CHANGE
- CAB TASK LIGHT