

TACTICAL TENDER 3000



TANK:

3.000 Gallons water.
20 Gallons foam - optional
Integrated tank/body construction in high-strength polypropylene

CHASSIS:

FREIGHTLINER 114SD 2027
6x4 400HP


- Conventional Cab
 - Wheelbase: 165"
 - Cummins L9 360 Diesel,
 - 400 HP - Option: 450 HP
 - Transmission: Allison Automatic 3000 EVS
 - 1.GVWR: 59,000 lbs
 - Rear View Camera System
 - Air conditioning
- Option: INTERNATIONAL chassis

PUMP

HALE SIDEKICK MBP-1000
1000 GPM@150 PSI
Options: 500/750/1250 gpm
PTO driven. Pump and Roll.
Electric primer.

FOAM PROPORTIONING SYSTEM - Optional

Trident FOAMATE.
Around-The-Pump system.
Class A.

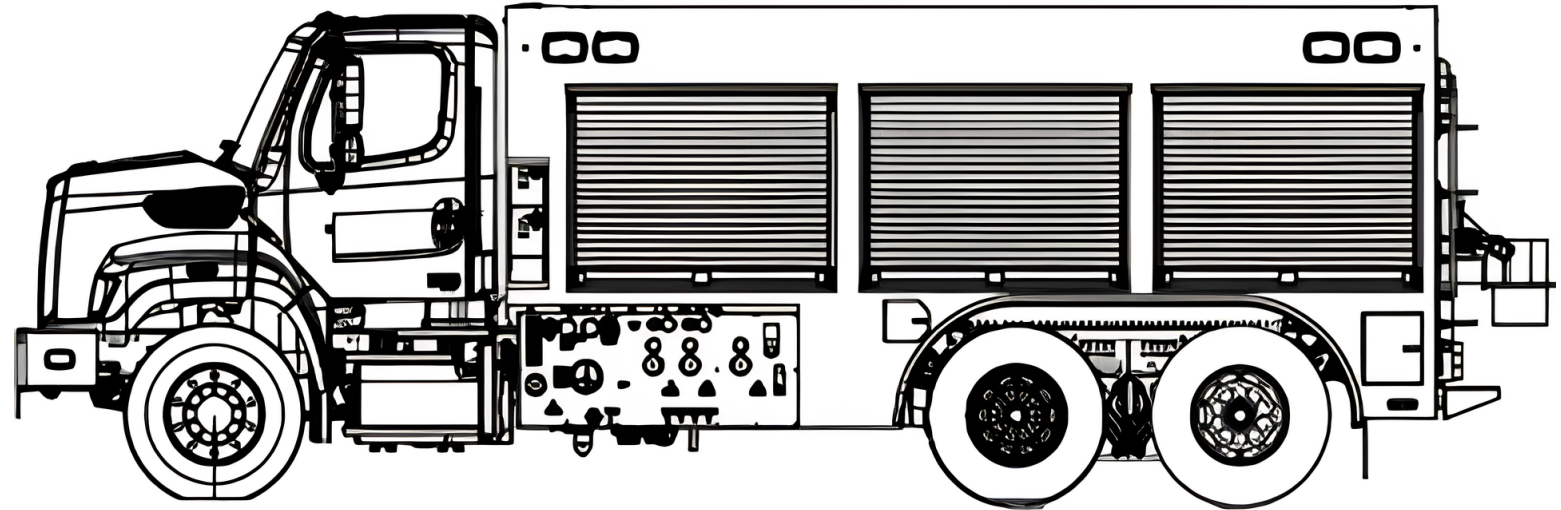

BODY AND COMPARTMENTS:

- Lightweight tank/body integrated construction.
- Compartments:
 - 3 on left side
 - 2 on right side
- Fully customizable.
- Aluminum roll-up doors.
- Internal 3000 gallons Foldatank storage
- Internal hard suction storage
- ZICO Quick Lift System - optional

INTAKES / DISCHARGES:

High flow TIG welded discharge and suction manifolds.

Discharges:

- 3 x 2 1/2" side discharge
- 1 x 1 1/2" preconnected - optional
- 1 x 1 1/2" bumper discharge - optional

Intakes:

- 1 x 4" valved suction
- 1 x 2 1/2" auxiliary suction
- 1 x 2 1/2" direct tank fill

Valves: Akron.

MONITOR, Bumper - Optional:

- Elkhart Brass 8495
 - Akron Forestry 3462
- In cab remote control.
Requires extended bumper.

PRESSURE GOVERNOR:

Included

LIGHTING and ELECTRICAL:

NFPA compliant FRC multiplex sytem + Whelen Cemcom Core for Whelen Lighting package.
Custom fabricated center console

ROOF:

Full length available for storage



EcoPolyFire® is a building technology using high-strength polypropylene with integrated tanks and body in a monoblock structure. More advanced, heavy-duty and lighter bodies, maximizing the tanks and lockers capacities.



25 YEARS WARRANTY



Flexibility: EPF® can absorb the energy and dissipate it in the surface, avoiding the tension concentrations which produce failures



Maintenance: EcoPolyFire does not need any preventive maintenance during its complete lifecycle



Density: Significantly lighter than conventional body systems allowing to increase the payload and therefore the tank capacity



Compartments: High flexibility in interior design Maximizes cargo capacity



Monoblock Concept Design: It allows the use of 100% bodywork volume



Recycling: All components built in EcoPolyFire are 100% recyclable



High Thermal Resistance




Potability: Tanks made of EcoPolyFire are compatible with the use of drinkable water




100% Corrosion-free: The material is fully resistant against corrosion



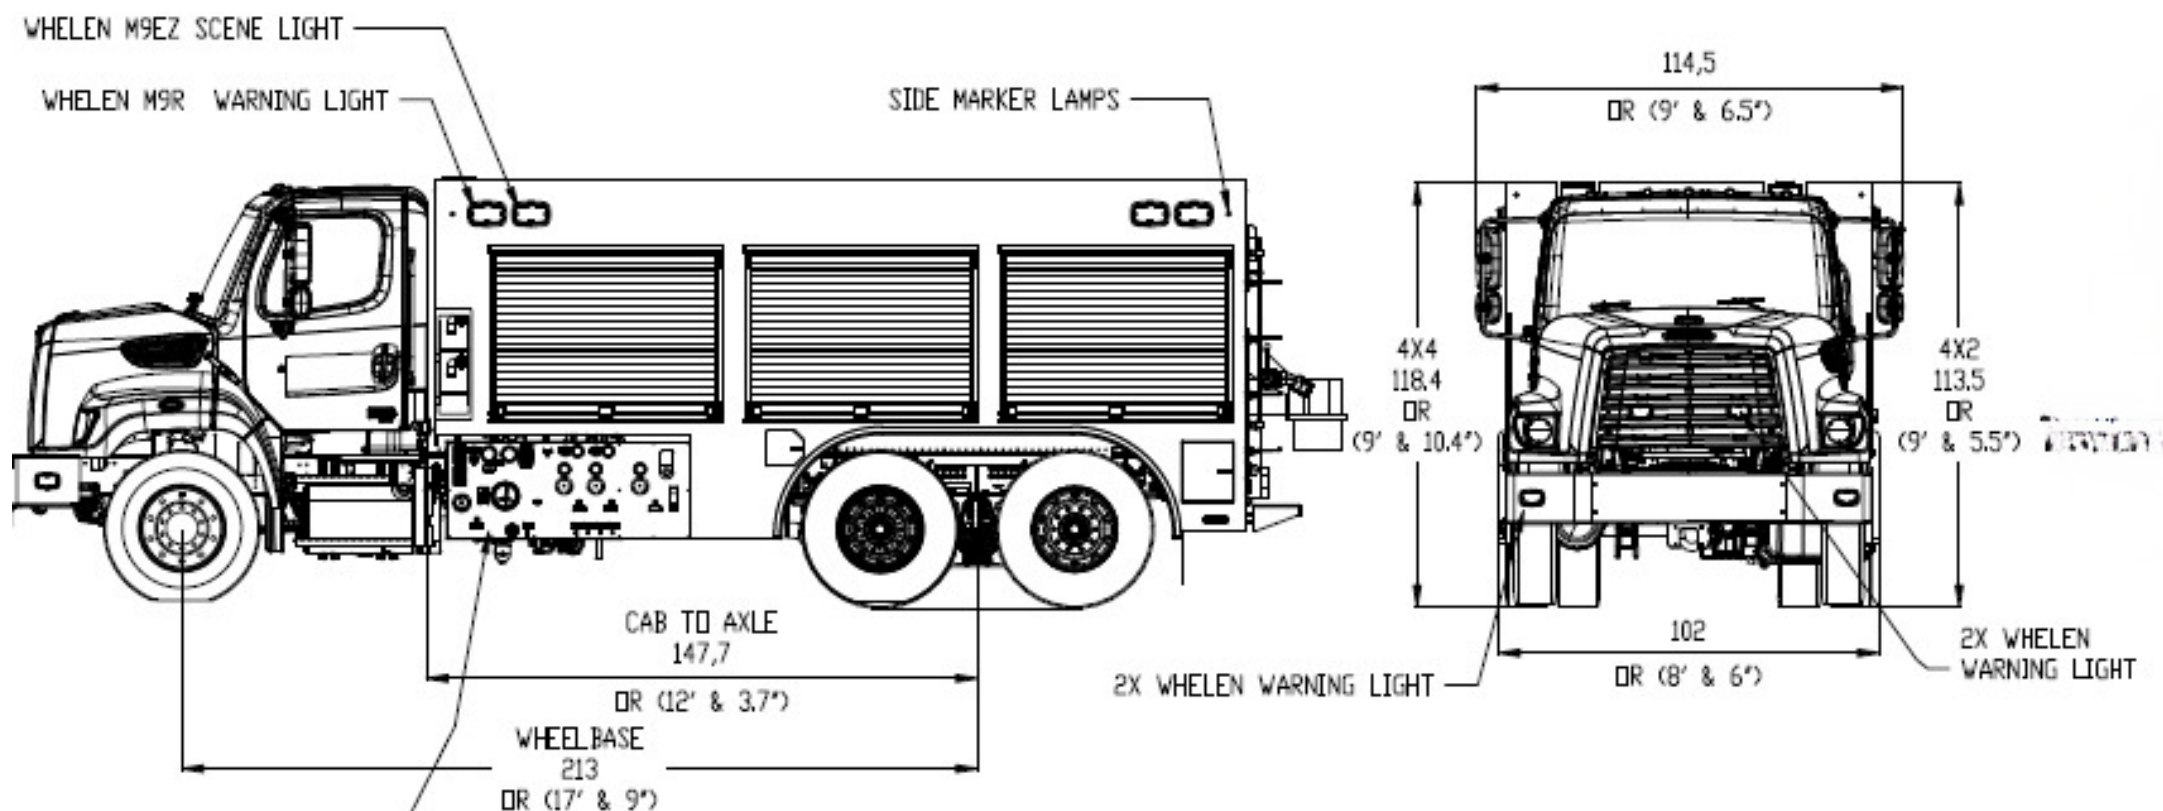

DETAILED VIEW OF PANEL
BELOW DRIVERS SIDE VIEW

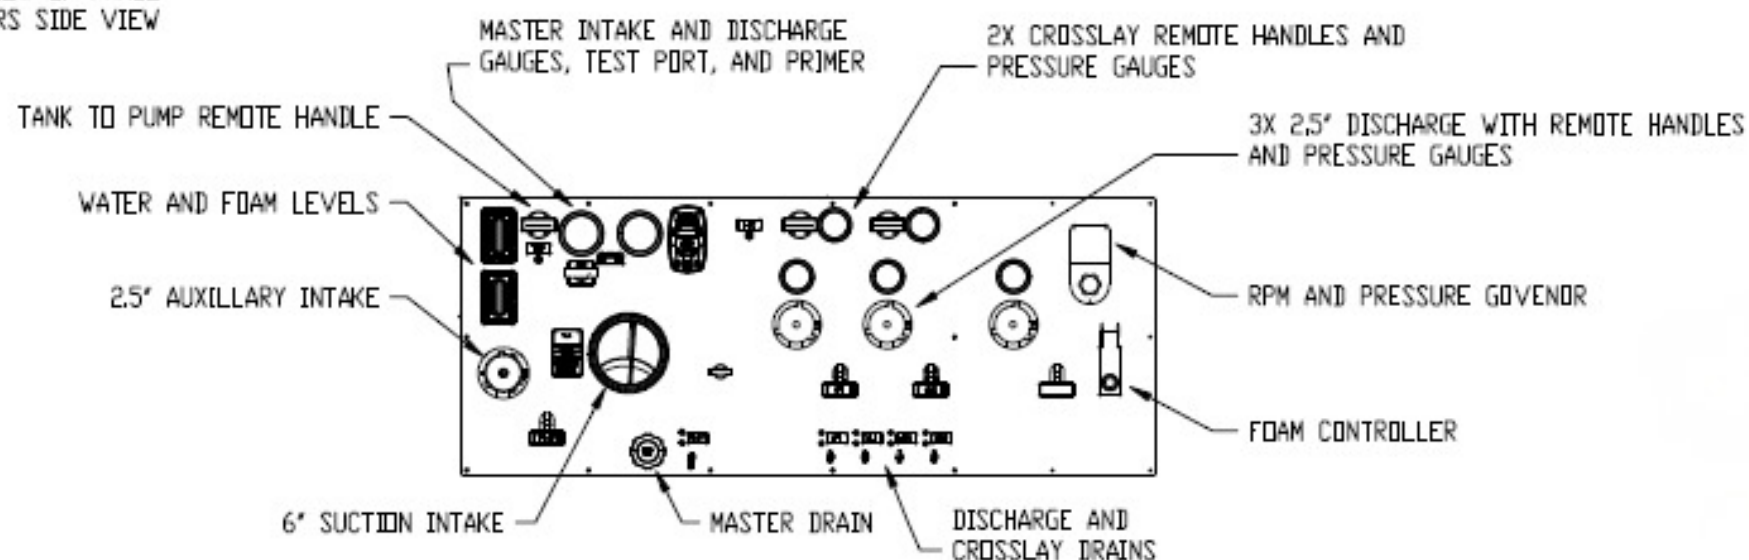

OPTIONS

- EXTENDED BUMPER 2.5" FRONT DISCHARGE - IF NOT FRONT MONITOR IS SELECTED
- CHANGE TO INTERNATIONAL CHASSIS
- CHANGE TO 450 HP ENGINE
- FOAM TANK (20 GALLONS) + CLASS A AROUND THE PUMP FOAM PROPORTIONER
- 1 OFFICER SCBA BOSTROM SEAT
- EXTENDED FRONT BUMPER +20" (OVERALL LENGTH: 25FT8IN)
- EXTENDED BUMPER 2.5" FRONT DISCHARGE - IF FRONT MONITOR IS SELECTED
- CHANGE PUMP TO HALE MBP 750 GPM - 3 DISCHARGES REQUIRED
- CHANGE PUMP TO HALE APS 500 GPM - 2 DISCHARGES REQUIRED
- CHANGE PUMP TO HALE DSD 1250 GPM - 5 DISCHARGES REQUIRED
- AKRON FORESTRY 3462
- ELKHART BRASS BRUSHHAWK 8495
- NON US STANDARD THREADS
- DUMP VALVE SWIVEL AND CHUTE
- EXTRA 2 1/2" DIRECT TANK FILL VALVE
- GROUND SWEEPS TIRE PROTECTION
- GROUND SWEEPS ATTACK ONLY (2 NOZZLE UNDERNEATH FRONT BUMPER)
- GROUND SWEEPS FULL PACKAGE (160-0112 + 160-0112 OPTIONS)
- HOSE REEL 1"X100FT - HANNAY REEL
- ALUMINUM HOSE BED DIVIDER
- CHANGE ROLL UP DOORS FROM HANSEN TO ROM - FINISH: BRUSHED
- ROLL UP DOOR COLOR CHANGE AVAILABLE
- EXTRA SPEEDLAYS TRAY - SET OF 2
- COMPARTMENT PAC STANDARD TOOL BOARD
- COMPARTMENT PAC STANDARD SHELVES
- COMPARTMENT STANDARD SWINGOUT BOARD.
- FOLDATANK 3000GAL
- HYDRAULIC PORTABLE TANK SYSTEM (PTS) + HARD SLEEVE KIT FOR 2 X 10' HARD SLEEVES - ZIAMATIC CORP
- SAFELINK® S-VISION™ LCDS DISPLAY- 7"
- FLEXIBLE CONSOLE MAP LIGHT
- TRAFFIC ADVISOR: WECANX® 2250 SUPER-LED® BUILD-A-BAR™ SERIES: MODEL: WX2240. 42" LONG
- OPTICOM - OPTICOM® INFRARED SYSTEM
- FEDERAL SIGNAL Q2B ELECTRO-MECHANICAL SIREN
- BROW LIGHT 81"
- LIGHTING PROTECTION GUARD KIT
- MAXVISION WATER TANK LEVEL DISPLAY WLA280-A00 ON BOTH SIDES + REAR
- INVERTER KUSSMAUL 817-1000WATTS. POWER TO CONSOLE / ADITONAL LOCATIONS AVAILABLE
- UL PUMP TEST

